

Outdoor TVs

Main Features

- **1200 nits Sunlight Readable LCD**
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- High Shock & Vibration Resistance
- IP65 Facial Waterproof



Specifications

Screen:

LCD panel	a-Si TFT Active Matrix LCD
Backlight	LED enhanced Backlight
Brightness	1200 cd/m2
Resolution	1920x1080 RGB (Full HD)
Pixel Pitch	0.1615(H) x 0.4845(V)
Display Color	16.7 M 8-bit
Contrast Ratio	2000:1
Viewin Angle	89/89/89/89
Response Time	6.5ms

I/O:

Input Interface	1 x VGA
	1 x S-Video
	1 x HDMI or DVI
	1 x Digital Tuner
	(round connector IP66 option)

Power:

Consumption	TBA
Stand by mode	9 W or less
Operate Voltage	AC 100 ~ 240V 60/50Hz

Environmental:

Operating temperature	-35 ~ 60C
Operating Humidity	10% ~ 85%
Storage temperature	-35 ~ 60C
Storage Humidity	5% ~ 95%RH

Accessories:

AC Power wire	x 1
Remote control	x 1
VGA cable	x 1
S-video cable	x 1
HDMI cable	x 1

Sound:

Nicam stereo
2 x 8 Watts

Other Features

Digital Tuner T/C	DVB-T, DVB-C . ATSC, ISDB. (Optional)
Dimming	Auto dimming by light sensor

Optional:

VESA Mount
IPTV Box




Specifications are subject to change without notice.

<http://www.platinum-vision.com>



Dimensional Outline

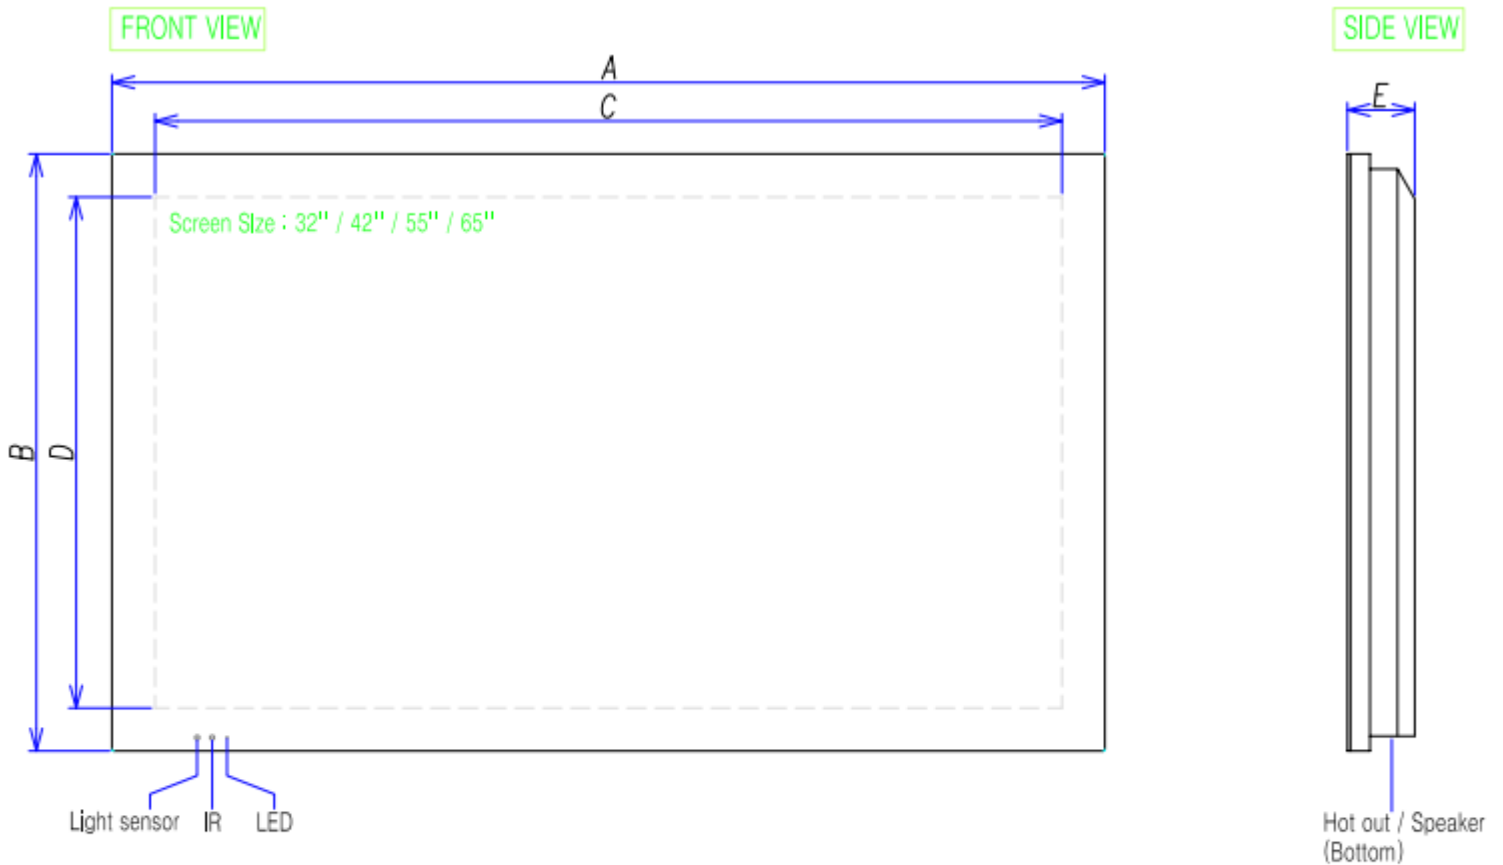

Model	Item	Screen Size	A (outline)	B (outline)	C (active area)	D (active area)	E (thick)	Resolution	Brightness	VESA Mount
POD-32		32"	840 mm	550 mm	696 mm	390 mm	160 mm	1920x1080	1200 cd/m ²	300 x 600mm
POD-42		42"	1040 mm	650 mm	928 mm	521 mm	160 mm	1920x1080	1200 cd/m ²	300 x 600mm
POD-55		55"	1328 mm	798 mm	1210 mm	681 mm	195 mm	1920x1080	1200 cd/m ²	400 x 800mm
POD-65		65"								

Core Technologies

-  Sunlight Readable
-  Low Power LED Backlight
-  Wide Dimming
-  Optical Bonding
-  Wide Temperature Range
-  AR Safety Glass



Specifications are subject to change without notice.

<http://www.platinum-vision.com>

